



ETA-Danmark A/S  
Göteborg Plads 1  
DK-2150 Nordhavn  
Tel. +45 72 24 59 00  
Fax +45 72 24 59 04  
Internet www.etadanmark.dk

Authorised and notified according  
to Article 29 of the Regulation (EU)  
No 305/2011 of the European  
Parliament and of the Council of 9  
March 2011

MEMBER OF EOTA



## European Technical Assessment ETA-17/0989 of 2021/01/04

### I General Part

**Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S**

**Trade name of the construction product:**

SkamoWall Basic Board, SkamoWall Basic Bore and SkamoWall Basic Wedge

**Product family to which the above construction product belongs:**

Mineral thermal insulation board

**Manufacturer:**

Skamol A/S  
Hasselager Centervej 1  
DK-8260 Viby  
Tel: +45 97 72 15 33  
Fax: +45 97 72 49 75  
www.skamol.com

**Manufacturing plant:**

Skamol A/S manufacturing plants – held on file by  
ETA-Danmark A/S

**This European Technical Assessment contains:**

7 pages including 1 annex which is an integral part of  
this ETA

**This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of:**

EAD 040012-00-1201; Thermal insulation board  
made of mineral material

**This version replaces:**

The ETA with the same number issued on 2018-01-  
05

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

## **II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT**

Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### **1 Technical description of the product and intended use**

#### **Technical description of the product**

The SkamoWall Basic Board, SkamoWall Basic Bore and SkamoWall Basic Wedge are mineral thermal insulation boards made of calcium silicate. The insulation board has an organic content of more than 1%.

The surface of the thermal insulation boards can be provided in the factory with a priming coat.

Details of the composition and manufacturing process are deposited with ETA-Danmark A/S.

#### **Dimensions and density**

See annex A for the dimensions of the boards.

The boards have a density of  $225 \text{ kg/m}^3 \pm 10\%$

### **2 Specification of the intended use in accordance with the applicable European Assessment Document (hereinafter EAD)**

The insulation board is used for the thermal insulation of walls and ceilings.

SkamoWall Basic Board is intended to be used as an insulation product for the thermal insulation of walls and ceilings.

SkamoWall Basic Bore is intended to be used as an insulation product for interior insulation of door and window jambs

SkamoWall Basic Wedge is intended to be used as an insulation product for interior insulation of the joints between ceiling and walls which reduces the thermal bridges in the corner area

The insulation board can be glued to the substructure and can be plastered, coated or painted. Fixing with suitable anchors is possible

The provisions made in this European Technical Assessment are based on an assumed intended working life of the boards of 50 years.

The indications given on the working life cannot be interpreted as a guarantee given by the producer or

### 3 Performance of the product and references to the methods used for its assessment

#### Characteristic

#### Assessment of characteristic

#### 3.2 Safety in case of fire (BWR2)

Reaction to fire

The SkamoWall Basic Board, SkamoWall Basic Bore and SkamoWall Basic Wedge are classified as **Euroclass A1** in accordance with EN 13501-1 and Commission Delegated Regulation 2016/364

#### 3.3 Hygiene, health and the environment (BWR3)

Influence on air quality

No Performance assessed

Water vapour transmission

$\mu = 3,0$  in accordance with EN 12086:2013

#### 3.6 Energy economy and heat retention (BWR6)

Thermal conductivity

The measurements have been carried out in accordance with EN 12667: 2001, and the category for declaring the performance is Category 1 according to EN ISO 10456: 2007

$\lambda_{(10,dry,limit)}$ [W·m-1·K-1]	0,068
$\lambda_{(23,50)}$ [W·m-1·K-1]	0,068
$u_{23,50}$ [kg/kg]	0,014
$u_{23,80}$ [kg/kg]	0,029
$f_{u,1}$	1,26
$f_{u,2}$	2,39
$F_{m1}$	1,02
$F_{m2}$	1,04

Dimensions/geometry

Thickness in accordance with EN 823:  $\pm 1,5$  mm

Length and width in accordance with EN 822:

- dimensions < 600 mm:  $\pm 2,0$  mm
- dimensions  $\geq 600$  mm:  $\pm 2,5$  mm

Squareness in accordance with EN 824:

Length and width:  $S_b \leq 3$  mm/m

Thickness:  $S_d \leq 2$  mm

Flatness in accordance with EN 825:

$S_{max} \leq 2$  mm

Water absorption

Short-term water absorption by partial immersion for a 40 mm thick board in accordance with EN 1609:

**28 kg/m<sup>2</sup>**

Long-term water absorption by partial immersion for a 40 mm thick board in accordance with EN 12087:

**34 kg/m<sup>2</sup>**

Density

The density of the board in accordance with EN 1602: **225 kg/m<sup>3</sup>  $\pm$  10%**

Bending strength

No performance assessed

Compressive strength

Compressive strength in accordance with EN 826: **CCS  $\geq$  1500 KPa**

Characteristic	Assessment of characteristic
Dimensional stability after 48 h storage at (70 ± 2) °C	Dimensional stability under specified temperatures in accordance with EN 1604: Relative change of dimensions in length $\Delta\epsilon_l \leq 0,5\%$ Relative change of dimensions in width $\Delta\epsilon_b \leq 0,5\%$ Relative change of dimensions in thickness $\Delta\epsilon_d \leq 1\%$
Dimensional stability after 48 h storage at (23± 2) °C and (90±5) % RH	Relative change of dimensions in length $\Delta\epsilon_l \leq 0,5\%$ Relative change of dimensions in width $\Delta\epsilon_b \leq 0,5\%$ Relative change of dimensions in thickness $\Delta\epsilon_d \leq 1\%$
Tensile strength perpendicular to faces	No performance assessed
Behaviour under point load	No performance assessed
Porosity	Porosity in accordance with EN 993-1: <b>91 %</b>

#### **4 Attestation and verification of constancy of performance (AVCP)**

##### **4.1 AVCP system**

According to the decision 1999/91/EC of the European Commission<sup>1</sup>, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 1, due to the organic content exceeding 1 %

#### **5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark prior to CE marking.

Issued in Copenhagen on 2021-01-04 by



Thomas Bruun  
Managing Director, ETA-Danmark

**Annex A**  
**Dimensions of the boards**



**SkamoWall Basic Board**

Length 300-2440 mm


Width 150-1220 mm

Thickness 5-100 mm

**SkamoWall Basic Wedge**

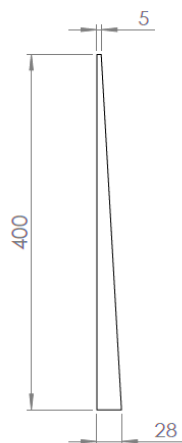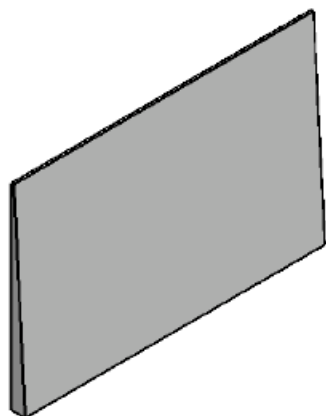

**SkamoWall Basic Bore**

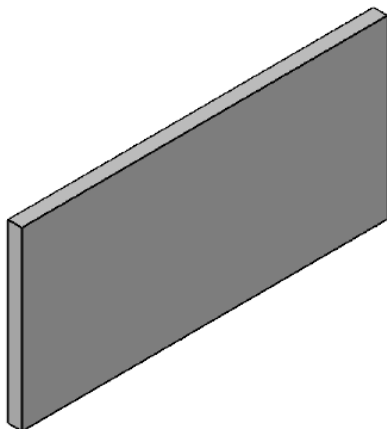

Dimensions in millimeters

The dimensions of Skamowall Basic Wedge and SkamoWall Basic Bore can vary in the limits specified for SkamoWall Basic Board.