

# SkamoEnclosure made **easy**

---



# One system

SkamoEnclosure is a complete system,  
which consists of SkamoEnclosure Board and accessory products.



## **Skamol** Adhesive

Mortar

## **Skamol** Metal Corner

Corner protector (metal)

## **Skamol** Torx

Screw (torx)

## **Skamo**Enclosure Board

Insulation board (lightweight)

## **Skamol** Plug

Wall plug

## **Skamo**Enclosure Vermiculite Board

Insulation board

## **Skamol** Corner

Corner protector (PVC)

## **Skamol** Primer

Primer

## **Skamol** Glue

Glue

## **Skamol** Screw

Screw

## **Skamol** Joint Tape

Joint tape

## **Skamol** Smooth Plaster

Plaster (fine-grained)

## **Skamol** Mesh

Reinforcement mesh

## **Skamol** Structural Plaster

Plaster (coarse-grained)



# Easier projects



## Where SkamoEnclosure is used

SkamoEnclosure is used as:

- Protection/firewall behind e.g. wood stoves.
- Fireplace enclosure



## SkamoEnclosure is safe and thoroughly tested

CE and A1 certified, approved by RRF (Germany) and RISE (Norway).



## Benefits of SkamoEnclosure

- Easy to machine with standard hand tools
- Quick to mount for one person
- No hazardous particles are released during mounting



## About SkamoEnclosure Board

SkamoEnclosure Board is a calcium silicate board that is asbestos- and quartz free.

# Mounting: Protection / Firewall

## **Mounting of SkamoEnclosure as protection / firewall**

Only use products from the SkamoEnclosure system.

It is not necessary to ventilate between a flammable wall and a SkamoEnclosure Board.

The stove must be placed at least 100 mm from the SkamoEnclosure unit.

Mount either a SkamoEnclosure Board (total thickness 100mm) OR a 50mm SkamoEnclosure Board with a 20mm convection cell.

### **Note**

Products approved for materials with a Class A fire rating can be used behind a wood-burning stove (statement from the Danish Transport, Construction and Housing Authority).

A SkamoEnclosure Board is approved for materials with Class A1 fire rating.

**1**

### **Straighten the wall**

Straighten the wall so that you get a smooth surface. Use Skamol Adhesive.

**2**

### **Apply Skamol Adhesive to the wall**

Use a notched trowel.

**3**

### **Mount SkamoEnclosure Boards**

The boards are abutted against each other. Apply Skamol Adhesive to the edges adjacent to other boards.

**4**

### **Adjust the boards when needed – quite simply**

Use ordinary tools.

**5**

### **Apply Skamol Primer on the boards**

Skamol Primer is applied to all joints and exterior surfaces on the board.

The primer is ready to use and does not need to be diluted.

**6**

### **Fill joints and fully putty the wall**

Choose between Skamol Smooth Plaster or Skamol Structural Plaster.

Use the selected plaster to fill joints. The wall is done!



# Mounting: Fireplace enclosure

## Mounting of SkamoEnclosure as fireplace enclosure

Only use products from the SkamoEnclosure system.

The fireplace insert manufacturer's instructions must be complied at all times; they include the distance to combustible material, the dimensions of convection grates, etc.

### Note

Always ensure a minimum distance of 5mm between the fireplace insert and the SkamoEnclosure Board to take account of steel's thermal expansion coefficient.

- 1 Adjust the boards when needed – quite simply**  
Use ordinary tools.
- 2 Apply Skamol Primer on the boards**  
Skamol Primer is applied to all joints and exterior surfaces on the board.  
The primer is ready to use and does not need to be diluted.
- 3 Apply Skamol Glue on the joints**  
Cut the end of the Skamol Glue, squeeze the air out of the bag and place it in the Skamol Glue Pistol. The glue is applied to all joints on the boards.
- 4 Assemble SkamoEnclosure Board**  
Use Skamol Screw or Skamol Torx to assemble the boards.
- 5 Mount Skamol Joint Tape**  
Skamol Joint Tape is mounted over joints.
- 6 Prepare the plaster**  
Choose between Skamol Smooth Plaster or Skamol Structural Plaster.
- 7 Mount Skamol Corner**  
Use ordinary tools to adjust the length. A thin layer of plaster is placed where the corner protector is to be mounted.  
Press the corner protector into the plaster.
- 8 Mount Skamol Mesh**  
Use ordinary tools to adjust the length. A thin layer of plaster is placed where the reinforcement mesh is to be mounted. Press the reinforcement mesh into the plaster.
- 9 Fully putty the framing**  
Use the selected plaster. The framing is complete!





- ❖ Prüfstelle nach Bauproduktenverordnung (EU) Nr. 305/2011, notified body number: NB 1625
- ❖ Prüflabor nach DIN EN ISO/IEC 17025:2005, DAkkS Nr. D-PL-17727-01-00
- ❖ Prüf-, Überwachungs- und Zertifizierungsstelle nach LBO, Kennziffer: NRW 15
- ❖ Prüf-, Überwachungs- und Zertifizierungsstelle im bauaufsichtlichen Zulassungsverfahren
- ❖ DIN CERTCO Prüfstelle, Kennziffer: PL139

**Test report on a comparison test between an insulation material made of calcium silicate and an insulation material made of mineral wool with a fireplace in accordance with EN 13229:2001/A2:2004/AC:2007**

<u>Testing station</u>	<b>RRF Rhein-Ruhr Feuerstätten Prüfstelle GmbH</b>
Name, Address	Im Lipperfeld 34 b D-46047 Oberhausen Telefon: +49(0)208-607041 - 0, Fax: +49(0)208-607041 - 28
Reference No.	<b>RRF - SB 17 4612-2</b>
<u>Manufacturer</u>	<b>Skamol A/S</b>
Name, Address	Sletvej 2C, DK-8310 Tranbjerg J
Trademark	<b>Skamol Group</b>
<u>Product</u>	Insulation material and mortar
Type, batch, serial number:	<b>SkamoEnclosure Board</b> <b>SkamoEnclosure Structural Plaster</b>
Initiator	Manufacturer
Date of delivery	12. Dezember 2017
Test location	Im Lipperfeld 34 b, 46047 Oberhausen
Technician	Teuwsen, T.

Brief summary by testing laboratory:

The above mentioned Insulation material was undergone a safety test according to DIN EN 13229 chapter 4.9, for the purpose of comparison with mineral wool.


This test report has been drawn up without prejudice to the rights of third parties in respect of private trademark rights of the initiator or manufacturer and may not be published in extracts.

The test report consisting of pages 1 to 15 and the appended test documentation a to b contains the results of the testing relating to this standard.

This test report is the translation of the original German test report. In case of doubts, the German version is valid

This test report replaces test report no. RRF - 17 4612-1 of 17. december 2018.

Oberhausen, 16. january 2019  
(Place and date)

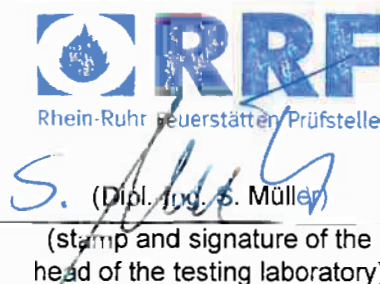

**RRF**  
Rhein-Ruhr Feuerstätten Prüfstelle  
S. Müller  
(Dipl.-Ing. S. Müller)  
(stamp and signature of the head of the testing laboratory)



# PRODUKTDOKUMENTASJON

RISEFR 120-0262

Med henvisning til Plan- og bygningsloven av 27. juni 2008, med Byggt teknisk forskrift av 1. juli 2017 og tilhørende veiledning, bekrefter RISE Fire Research, med grunnlag i prøvningsrapporter og vurderinger, at angitt produkt og anvendelse med tilhørende monteringsanvisning imøtekommer norske myndigheters krav til brannteknisk sikkerhet.

**Produkt:** SkamoEnclosure Board som brannmur

**Produktansvarlig:** Skamol A/S  
Hasselager Centervej 1, 8260 Viby, Danmark

Produktdokumentasjonens gyldighet er betinget av at produktet er i overensstemmelse med spesifikasjonene i vedlegg, at de blir montert og behandlet på en forskriftsmessig måte og at alle viktige detaljer i denne prosessen nøyaktig følger det som er beskrevet i tilhørende monterings- og bruksanvisning. Både anvisning og produktdokumentasjon skal følge produkt eller være lett tilgjengelig for kjøper, bruker, kontrollør og lokal saksbehandler/myndighet.

Produktet skal merkes med RISEFR 120-0262, i tillegg til produktnavn, produktansvarlig og/eller produsent og produksjonsinformasjon for sporbarhet. Merkingen skal være lett synlig.

Konstruksjonsdetaljer for produktet er beskrevet i "Standard konstruksjonsdetaljer for SkamoEnclosure Board, tilhørende Produktdokumentasjon RISEFR 120-0262". Den versjonen av detaljsamlingen som til enhver tid er arkivert hos RISE Fire Research, utgjør en formell del av godkjenningen.

Produktet skal ha en årlig, ekstern oppfølging av kvaliteten gjennom en tilvirkningskontroll, som er tilpasset produktet. Kontrollen skal overvåke produktets samsvar med dokumentunderlaget og være spesifisert i skriftlig avtale med RISE Fire Research.

Denne dokumentasjonen ble første gang utstedt **2019-09-12**. Fornyelse utstedes på grunnlag av skriftlig søknad. Oppsigelse ved innehaver skal være skriftlig med 6 måneders varsel. RISE Fire Research kan tilbakekalle en produktdokumentasjon ved misligheter eller misbruk og når skriftlig pålegg om endring ikke blir tatt til følge.

Utstedt: 2024-09-30

Gyldig til: 2029-10-01



Asbjørn Østnor  
Fagansvarlig dokumentasjon



Per Arne Hansen  
Prosjektleder dokumentasjon

## Notes

## Notes



One safe system, improved working environment  
and easy mounting.

Learn more at [www.skamol.com](http://www.skamol.com)

**Skamol by Etex**

Hasselager Centervej 1, 8260 Viby, Denmark

Tel.: +45 97 72 15 33

[www.skamol.com](http://www.skamol.com)